"Fine Wall/Ceiling Lamp is a minimal design refined to include only the essentials: a slim light, a form-pressed fixture with aluminum end caps, and a cord. We wanted it to feel delicate, almost jewelry-like — a sleek band of white light. It is a simple, raw expression of clarity and directness with an industrial character. Possible to hang both horizontally and vertically, we designed it so that the lamp's light source is laid bare, yet gives a no-glare, comfortable light."



— TAF Studio

Designed by	TAF Studio
About the Designer	TAF Studio is a Stockholm-based design and architecture studio, founded by Gabriella Gustafson and Mattias Ståhlbom. The duo works within product and interior design.
Environment	Indoor
Country of Production	China
Preassembled	Yes - but assembly of configurations are needed.
Description	Fine Wall/Ceiling Lamp is a take on a classic tube light, combining industrial minimalism with refined detailing for a truly elegant expression. A uniquely versatile piece, available in 3 sizes and 6 pre-made configurations that can be positioned in numerous playful ways. These characteristics make it a versatile design, offering understated lighting to enhance the space or serving as a bold statement piece, whether used individually or grouped together.
Material	Body in pressure-die casted and extruded, powder-coated aluminum. Diffuser in extruded opaque plastic. Single profiles come with an inline dimmer and plug. Configurations come with a wall/ceiling mounted driver integrated in white plastic driver box. Configurations are dimmable when hardwired—no dimmer on cable. Dimmable, integrated, and non-user replaceable LED light designed for Right to Repair means that only an electrician can replace the light source. Lumen maintenance: 30.000h. Kelvin: 2700K. CRI: >90.
Cleaning δ Care	Clean with a moist cloth. Always switch off the electricity supply before cleaning.
Light Source Included	120 cm, 60 cm, 90 cm, Configuration 1, Configuration 2, Configuration 3, Configuration 4, Configuration 5, Configuration 6: Yes.
Dimmable Function	Yes
Additional Information	Cord length 120 cm, 60 cm and 90 cm: 200 cm / 78.7" Cord lentgh Start Module: (AC Wire): 300 cm / 118.1" Cord length Start Module (DC Wire): 200 cm / 78.7" Cord length Connect/End (DC Wire): 37,5 cm / 14.8"
Configurations	For inspiration on configurations please refer to the Assembly Guidelines.

Dimensions

120 cm		
Length:	120 cm / 47.2"	
Height:	1,8 cm / 0.7"	
Depth:	2,4 cm / 0.9"	
Cord Length:	200 cm / 78.7"	<u>a</u>
Ū.		L
60 cm		
Length:	60 cm / 23.6"	
Height:	1,8 cm / 0.7"	
Depth:	2,4 cm / 0.9"	
Cord Length:	200 cm / 78.7"	
		L
90 cm	oo / ·"	
Length:	90 cm / 35.4"	
Height:	1,8 cm / 0.7"	
Depth:	2,4 cm / 0.9"	
Cord Length:	200 cm / 78.7"	H
.		L
Configuration (00 F / 05 0"	
Height:	89,5 cm / 35.2"	Ω.
Width:	60 cm / 23.6"	///
Depth:	2,4 cm / 0.9"	10
Configuration 2		
Height:	96 cm / 37.8"	
Width:	56,4 cm / 22.2"	
Depth:	2,4 cm / 0.9"	
Deptil.	2,4 Cm / 0.9	1
Configuration 3		
Height:	82 cm / 32.2"	А.А.
Width:	272 cm / 107.1"	
Depth:	2,4 cm / 0.9"	
Configuration 4	17 E / C O''	
Height:	17,5 cm / 6.9"	
Width:	313,5 cm / 123.4"	
Depth:	2,4 cm / 0.9"	0 0
Configuration 5		
Height:	264 cm / 103.9"	
Width:	17,5 cm / 6.9"	þ
Depth:	2,4 cm / 0.9"	
Deptii.	2, 1 Ciii / 0.7	
Configuration 6		
Height:	138 cm / 54.3"	Ω
Width:	56,5 cm / 22.2"	
	2,4 cm / 0.9"	IU
Depth:		

Ready-to-Ship

Black

Product Fact Sheet For more information visit muuto.com

Lamp Rating

Voltage Frequency IP Rating Classification Socket

Voltage Frequency IP Rating Classification Socket

Voltage Frequency IP Rating Classification Socket

12O cm 220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Configuration 2

220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Configuration 6

220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

60 cm 220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Configuration 3 220-240V 50/60Hz

50/60Hz IP20 Class II Integrated non-user replaceable LED 90 cm 220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Configuration 4

220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Configuration I

220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Configuration 5

220-240V 50/60Hz IP20 Class II Integrated non-user replaceable LED

Light Source Specification

pecification

Item Watt Lumen Lumen Maintenance Kelvin CRI Dimmable Risk Group Item Watt Lumen Lumen Maintenance Kelvin CRI Dimmable Risk Group

ltem

Watt Lumen Lumen Maintenance Kelvin CRI Dimmable Risk Group

Integrated, nonreplaceable LED 21W 1200lm 30000h 2.700K 90 Yes Except

120 cm

Configuration 2 Integrated, nonreplaceable LED

30000h 2.700K 90 Yes Except

Configuration 6 Integrated, non-

replaceable LED

30000h 2.700K 90 Yes Except

Integrated, nonreplaceable LED 13W 620lm 30000h 2.700K 90 Yes Except

60 cm

Configuration 3 Integrated, nonreplaceable LED

30000h 2.700K 90 Yes Except 30000h 2.700K 90 Yes Except Configuration 4 Integrated, nonreplaceable LED

90 cm

17W

950lm

Integrated, non-

replaceable LED

30000h 2.700K 90 Yes

Except

Integrated, nonreplaceable LED 30000h


2.700K 90 Yes Except

Configuration I

Configuration 5 Integrated, non-

replaceable LED

30000h 2.700K 90 Yes Except

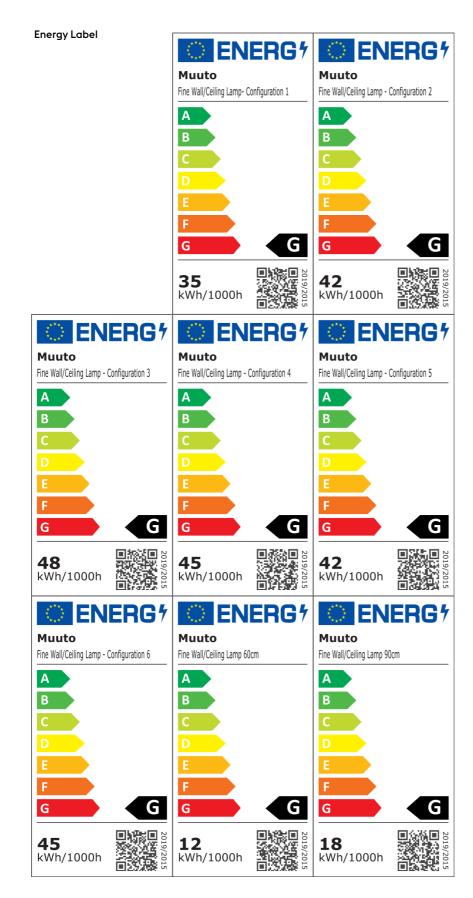



Tests, Labels $\boldsymbol{\delta}$ Certifications

Electromagnetic Compatibilty Electromagnetic Compatibility (EMC)

Safety & Regulations

ECO Design Directive Low Voltage Directive 2014/35 EU (LVD) REACH Restriction of Hazardous Substances Directive (RoHs) Waste of Electronic and Electrical Equipment (WEEE)



Explore Assets

DOWNLOAD SITE

Product Fact Sheet For more information visit muuto.com