

PAO GLASS PENDANT

PRODUCT FACT SHEET



HAY

PAO GLASS PENDANT


DESIGN BY NAOTO FUKASAWA, 2020

The Pao collection of lamps is an exciting collaboration with established Japanese designer Naoto Fukasawa. Named after the soft, glowing shape of traditional Mongolian Pao tents illuminated at night-time, Fukasawa set out to encapsulate the same atmospheric warmth and friendliness in the Pao Glass Pendant. Pao draws on Fukasawa's aesthetic of beautiful simplicity; creating an everyday object that draws on design values existing in the natural world. By keeping the aesthetics modest and simple, he brings the design into harmony with its environment, reinforcing his primary intention of making the atmosphere pleasant and comfortable. In the Pao Glass Pendant, Fukasawa has developed a custom LED light source and diffuser, which is nestled within the opal glass shade, offering a functional output of light, whilst still enabling a warm, homely glow. The functionality and the deliberate simplicity of the design make it suitable for a wide range of spaces and uses in domestic and corporate environments.

HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of functional and elegant pendants in opal glass or high-gloss steel.
- Also available as Pao Glass Table Lamp in opal glass.
- CE approved.
- Designed with an integrated LED light source with inline step dimmer.
- The fitting can be used in conjunction with a number of standard wall mounted dimming control units.
- The lamp is suitable for both private and office environments.
- Qualified for contract use.

DIMENSIONS



PAO GLASS PENDANT 350

DIAMETER / 35 CM / 13.8"

HEIGHT / 14,5 CM / 5.7"

MATERIALS

SHADE & DIFFUSER

Mouth blown opalscent high gloss glass.

LIGHT ENGINE

Polished aluminium and opal glass with a brass ball and socket joint for leveling.

CORD

Braided fabric cable with a silicone insulation.

COLOUR & FINISH



WHITE OPAL GLASS

Please note that the cord is black.

TECHNICAL SPECIFICATIONS


LIGHT SOURCE	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
Integrated LED	10W	Triac dimmable LED driver	220-240V AC at 50/60Hz	400 cm	No

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN)	CRI (1-100)
690lm	2600K, warm white	82

*Photometrics and the specification shown is taken using the integrated LED bulb fitted in the production luminaire.

PHOTOMETRICS

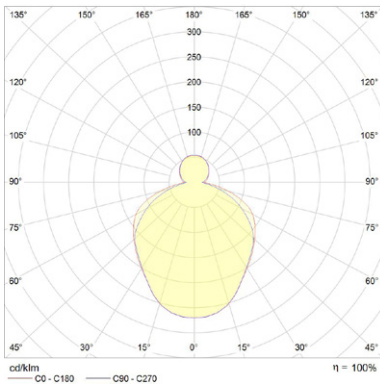

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[LINK TO IMAGE BANK](#)